

Wall Mounted High Buzzer Horn

S60ADH



PRODUCT SPECIFICATION

S60ADH

Materials ABS
Ambient operating temperature -25°C to +50°C
Sound volume Max.95dB at 1m
Protection rating IP54
Compliant with RoHS directive

- Elegant wall mounted buzzer horn
- Horn resonance structure gives the product low Power consumption and high sound tone
- Cone sound diffusion structure provides wide & excellent signal sound transmission effect



S60ADH

S60ADH Max.95dB, Wall Mounted Buzzer Horn


Model number	Pre-recorded sound	Voltage	Current	Certificates	Weight
S60ADH	Buzzer volume : Max.95dB	DC12V	80mA	CE	0.12kg
		DC24V	35mA		0.12kg
		AC110V	10mA		0.12kg
		AC220V	10mA		0.12kg

Pre-recorded sound	Sound pattern	Ch	Volume
1 Buzzer tone	Dududu(Consecutive)	Ch1	Max.95dB

Technical Diagram

Units: mm

S60ADH

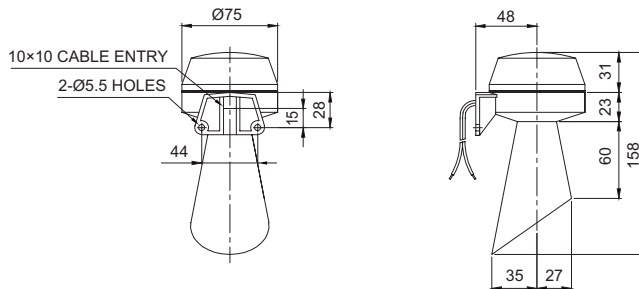

Customization

· 105dB strong buzzer type(Model number: S60ADH-HBZ)

Ordering Specification

S60ADH	-	220
[Model number]		[Voltage]
S60ADH		12-DC12V
		24-DC24V
		110-AC110V
		220-AC220V

REPRESENTED BY:

M/s. MJR Corporations,
 Mob: +91 - 98201 36798 / 98190 78896 / 9833358240
 Email: info@mjrcorp.com; mjrcorp@gmail.com