

SEBA Series



SEBA

PRODUCT SPECIFICATION

SEBALR I SEBAL
SEBAS I SEBA

Materials Lens-Tempered glass, Filter-PC, Housing-Al, Protection cage-STS316L, Reflector-PC, Reflector-Heat resistant ABS
Ambient operating temperature $-40^{\circ}\text{C} \leq T_{\text{amb}} \leq +60^{\circ}\text{C}$
Explosion protection rating Ex d IIC T6, IP55
Housing standard color MUNSELL No. 7.5BG 7/2
Cable entry 1/2" NPT

- Large explosion proof signal beacon and alarm bell combinations



SEBAL

SEBALR LED Revolving Signal Beacon and Alarm Bell

Model number	Voltage	Current	Volume	Certificates	Weight	Color
SEBALR	DC24V	190mA	Max.95dB	-	7.20kg	R-Red
	AC110V	140mA			7.92kg	A-Amber
	AC220V	60mA			7.92kg	G-Green

· Revolving speed: 120-140RPM

SEBAL LED Steady/ Flashing Signal Beacon and Alarm Bell

Model number	Voltage	Current	Volume	Certificates	Weight	Color
SEBAL	DC24V	210mA	Max.95dB	-	7.25kg	R-Red
	AC110V	160mA			7.99kg	A-Amber
	AC220V	70mA			7.99kg	G-Green

· Flashing rate: 60-80 flashes/min(Built in switch for steady/flashing selection)

SEBAS Xenon Strobe Signal Beacon and Alarm Bell

Model number	Voltage	Current	Xenon lamp			Volume	Certificates	Weight	Color
			Spec	Standard	Parts no				
SEBAS	DC24V	660mA	200V -550V	EUB0641 -1A(G) U type	48	Max. 95dB	-	7.37kg	R-Red
	AC110V	220mA						8.06kg	A-Amber
	AC220V	160mA						8.06kg	G-Green


· Lamp connector fastening structure allows for convenient lamp replacement

· Flashing rate: 60-80 flashes/min

SEBA Bulb Revolving Signal Beacon and Alarm Bell

Model number	Voltage	Current	Bulb			Volume	Certificates	Weight	Color
			Spec	Standard	Parts no				
SEBA	DC24V	870mA	24V15W	G23 15S	18	Max. 95dB	KIMM	7.37kg	R-Red
	AC110V	290mA	12V15W	G23 15S	17			8.06kg	A-Amber
	AC220V	140mA	12V15W	G23 15S	17			8.06kg	G-Green


· Revolving speed: 120-140RPM



Technical Diagram

Units: mm

·SEBALR / SEBAL / SEBAS / SEBA

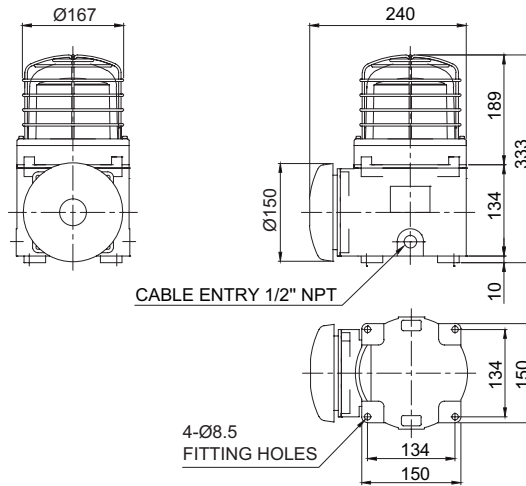

SEBAS



SEBALR

Customization

- Explosion proof cable gland attached type available (Standard type does not come with explosion proof cable gland)
- 2 ways cable entries
- Customized cable entry (3/4" NPT, M20×1.5, M25×1.5) available

Ordering Specification

SEBA	-	220	-	R
[Model number]		[Voltage]		[Color]
SEBALR		24-DC24V		● R-Red
SEBAL		110-AC110V		● A-Amber
SEBAS		220-AC220V		● G-Green
SEBA				● B-Blue

REPRESENTED BY:-

M/s. MJR Corporations,

Mob: +91 - 98201 36798 / 98190 78896 / 9833358240

Email: info@mjrcorpn.com; mjrcorpn@gmail.com