

SA NA Series



SA NA200

PRODUCT SPECIFICATION

SA NA200 | SA NA400 | SA NA700

Materials Horn-PC, Solenoid valve box-ABS
Ambient operating temperature -20°C to +60°C
Protection rating IP56
Air pressure 5-7kg/cm²
Housing standard color
 R-Red, BK-Black, Cian-MUNSELL No.7.5BG 7/2
Volume Max.130dB at 1m

- High volume horn uses compressed air to power the high pitched sound made with the diaphragm
- Uses a special material which consumes a small quantity of compressed air and has long durability

REPRESENTED BY:
 M/s. MJR Corporations
 Mob: +91 - 98201 36798 / 98190 78896 / 9833358240
 Email: info@mjrcorp.com; mjrcorp@gmail.co

- **SA NA200: 200-300Hz**
- **SA NA400: 400-600Hz**
- **SA NA700: 700-800Hz**

SA NA Series Air Horns for Vessels and Heavy Industrial Applications, Max.130dB

Model number	Frequency	Volume	Voltage	Current	Certificates	Weight	Color
SA NA200	200-300Hz		DC24V	450mA		1.19kg	● R-Red
SA NA400	400-600Hz	Max.130dB	AC110V	200mA	-	1.13kg	● BK-Black
SA NA700	700-800Hz		AC220V	100mA		1.07kg	● 7.5BG-Cian

※ If you need a product for use in a vehicle or in a place subject to severe vibration or impact, please contact us.

Customization

- Horn and solenoid valve box available separately for individual installation
- Non return valve, Y filter installation and regulator



Non return valve



Y filter




Regulator

Ordering Specification

SA NA200	-	220	-	R
[Model number]		[Voltage]		[Color]
SA NA200		24-DC24V		● R-Red
SA NA400		110-AC110V		● BK-Black
SA NA700		220-AC220V		● 7.5BG-Cian


REPRESENTED BY:
M/s. MJR Corporations,
Mob: +91 - 98201 36798 / 98190 78896 / 9833358240
Email: info@mjrcorp.com; mjrcorp@gmail.com



Technical Diagram


Units: mm

·SANA200

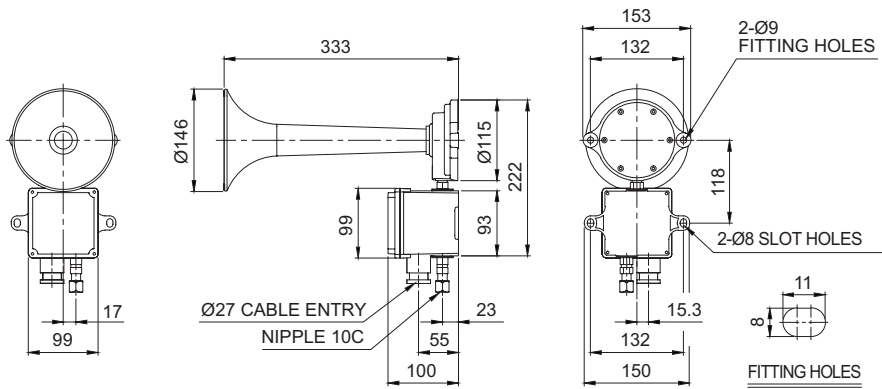

SANA400

·SANA400

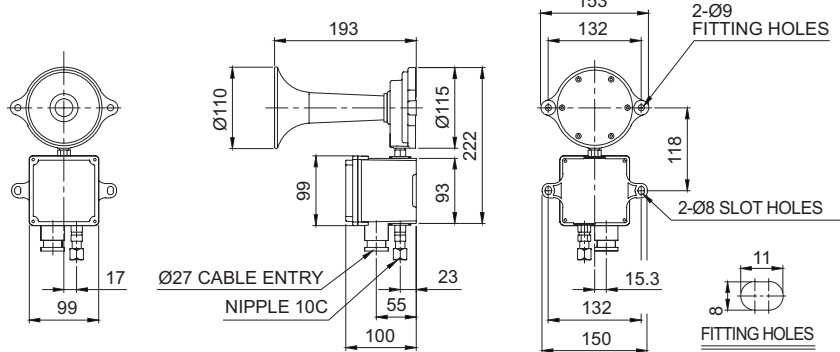

SANA700

·SANA700

