

TALK-BACK SYSTEM

TYPE: SCM - CINTER 500

MODEL: CINTER 505 (Switchboard for 5 substations)





FEATURES

- Master station with 5 lines selection
- Material: aluminium
- All call facility for general warnings
- Alphanumeric LCD display (LED backlight)
- Acoustic/luminous indication of incoming calls
- Step volume control
- Connector for gooseneck or handheld microphone
- Call signal

TECHNICAL SPECIFICATIONS

Power supply	24 VDC
Power consumption	25 W
Operating temperature	-20°C to +50°C
Frequency range	200 Hz - 8Khz (-3dB)
Output volume	Adjustable
Microphone input	Contact for handheld or gooseneck microphone
Switch	Push-button type
Communication	Hands free in remote loudspeaker
Assembly	Console
Weight	Approx. 2 Kg

CINTE 505 EXTENSIONS

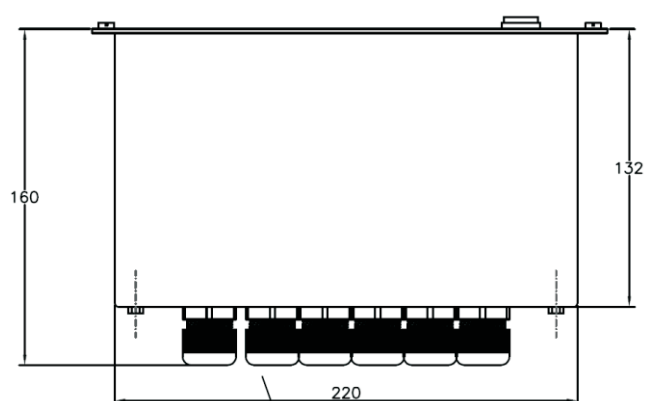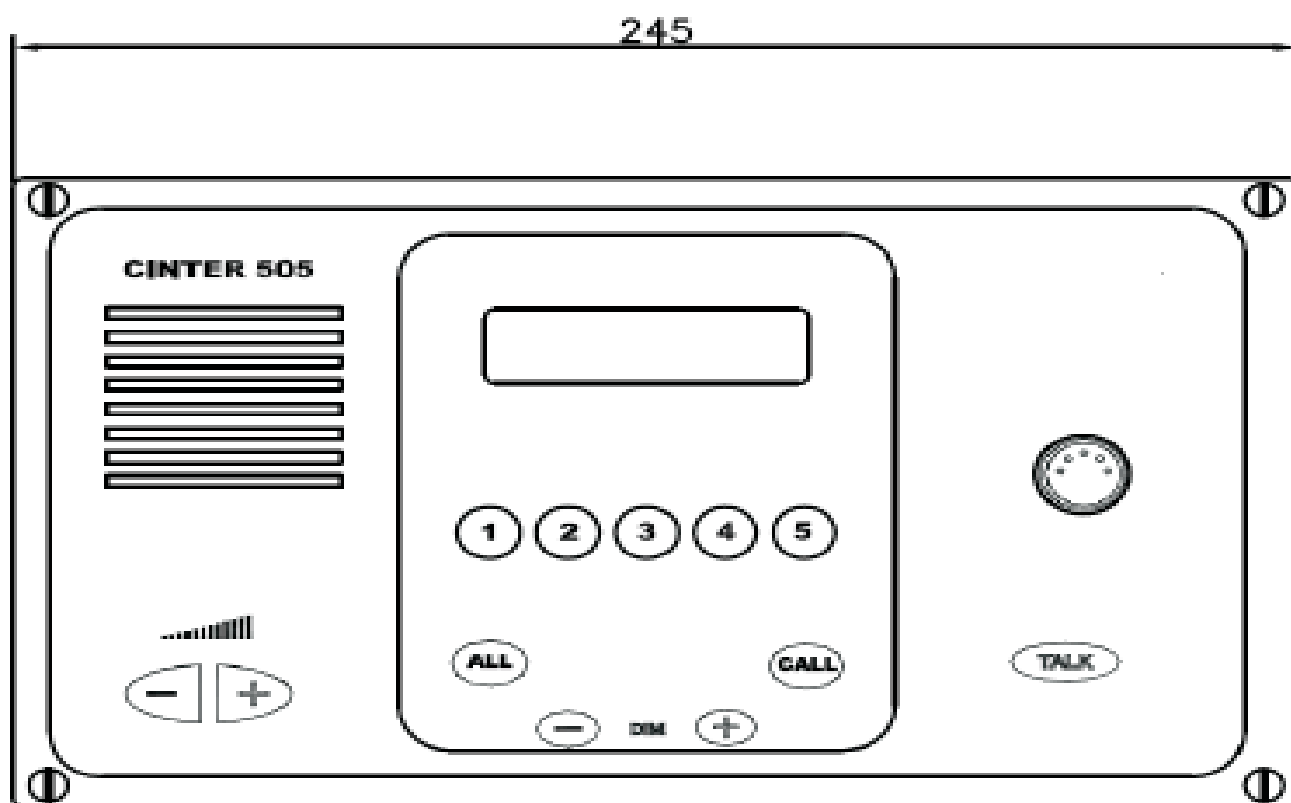

6 PG-16

