



S100LR

PRODUCT SPECIFICATION

S100LR | S100MLR

Materials Lens-AS, Housing-ABS,
Reflector-Heat resistant ABS

Ambient operating temperature -20°C to +50°C

Volume Max.90dB at 1m

Protection rating IP44, IP54

Revolving speed 120-140RPM

Compliant with RoHS directive

- Ø100mm general purpose LED revolving warning light
- Excellent omni-directional visibility with LED light collecting system and special multifaceted reflector
- Shock and vibration-resistant from vehicle operation with long-lasting LED
- Possible to select and use the specifications suitable for the usage environment between the general type and the built-in buzzer type

S100LR LED Revolving Warning Lights

Model number	Voltage	Current	Certificates	Weight	Color
S100LR	DC12V	180mA	-	0.39kg	● R-Red
	DC24V	125mA		0.39kg	● A-Amber
	AC110V	35mA		0.47kg	● G-Green
	AC220V	20mA		0.47kg	● B-Blue

· Protection rating: IP44


Wiring Instructions

- External Power line
UL1015 AWG18(0.75sq) x 2C 400mm
- This product can be wired regardless of polarity.
- AC voltage switch built-in type:
AC110V and AC220V can be selected with a built-in 110/220V switch.

Technical Diagram

·S100LR

Units: mm

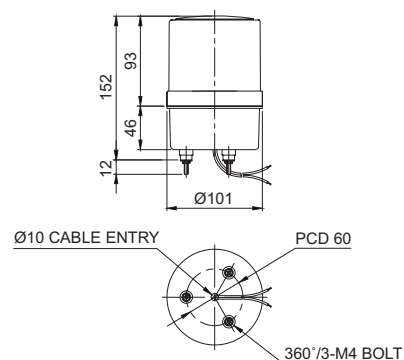

Customization

- 2 buzzer sound types: Both prolonged(beep, beep) and staccato(beep, beep, beep) buzzer output available

Model number
S100RLR / S100DR


Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount




S100RLR




S100DR



Wall Mount Bracket
SWP125



Wall Mount Bracket
SWM125



Feature of LED revolving warning lights

LED revolving warning lights has Qlight's distinctive LED light collecting system and special multifaceted reflector allowing excellent omni-directional visibility

Ordering Specification

S100LR	-	BZ	-	220	-	R
[Model number]		[Buzzer option]		[Voltage]		[Color]
S100LR		(None)		12-DC12V		● R-Red
		- No buzzer		24-DC24V		● A-Amber
		BZ		110-AC110V		● G-Green
		- Built-in buzzer		220-AC220V		● B-Blue

REPRESENTED BY:

M/s. MJR Corporations,
Mob: +91 - 98201 36798 / 98190 78896 / 9833358240
Email: info@mjrcorp.com; mjrcorp@gmail.com